


PARAMETERS

Impedance	8 ohms
Re	6.5 ohms
Le	1 mH @ 1 kHz
Fs	48.5 Hz
Qms	6.65
Qes	0.53
Qts	0.49
Mms	20.9g
Cms	0.52 mm/N
Sd	98.5 cm ²
Vd	49.3 cm ³
BL	8.83 Tm
Vas	6.79 liters
Xmax	5.0 mm
VC Diameter	75 mm
SPL	84.4 dB @ 2.83V/1m
RMS Power Handling	100 watts
Usable Frequency Range (Hz)	45 - 4,100 Hz


FEATURES

- Dual copper shorting rings in the motor for reduced energy storage
- 3" edgewound voice coil on titanium former provides exceptional transient response
- Woven glass-fiber cone provides excellent stiffness for minimal cone flex
- High excursion suspension design with woven tinsel leads and fully ventilated frame
- High-power, ultra-low-distortion design

IMPEDANCE/PHASE

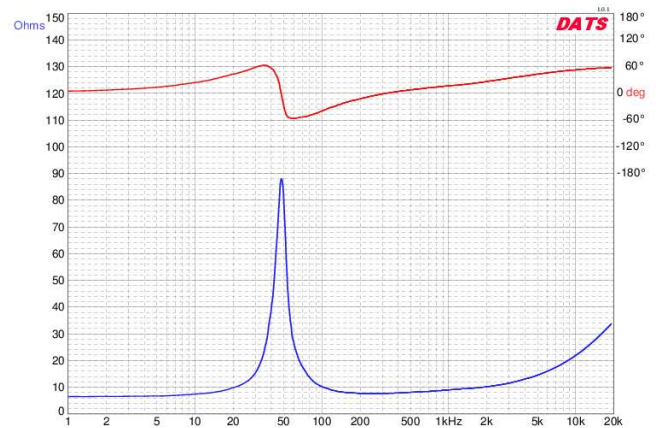

FREQUENCY RESPONSE

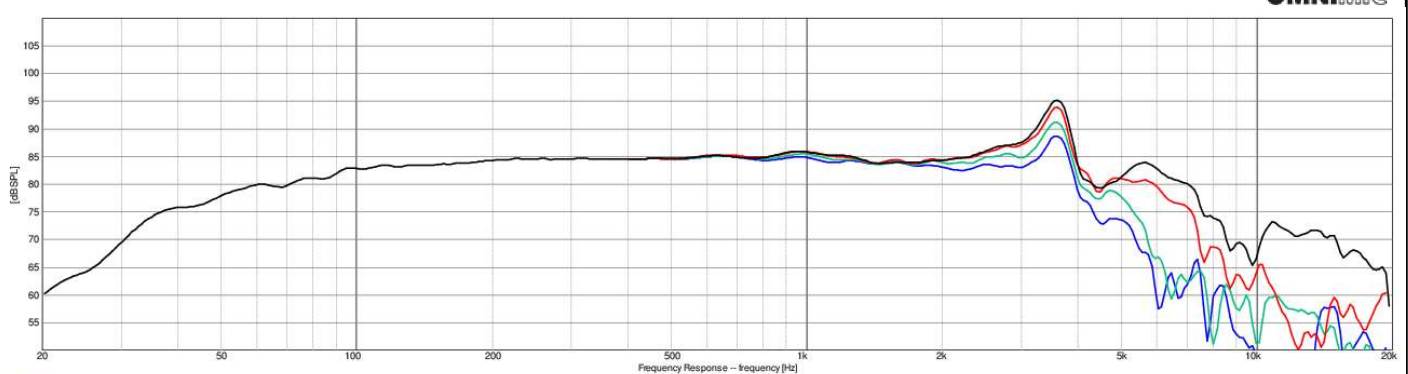

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°