





UM12-22 12" Ultimax DVC Subwoofer 2 ohm Per Coil

UM12-22

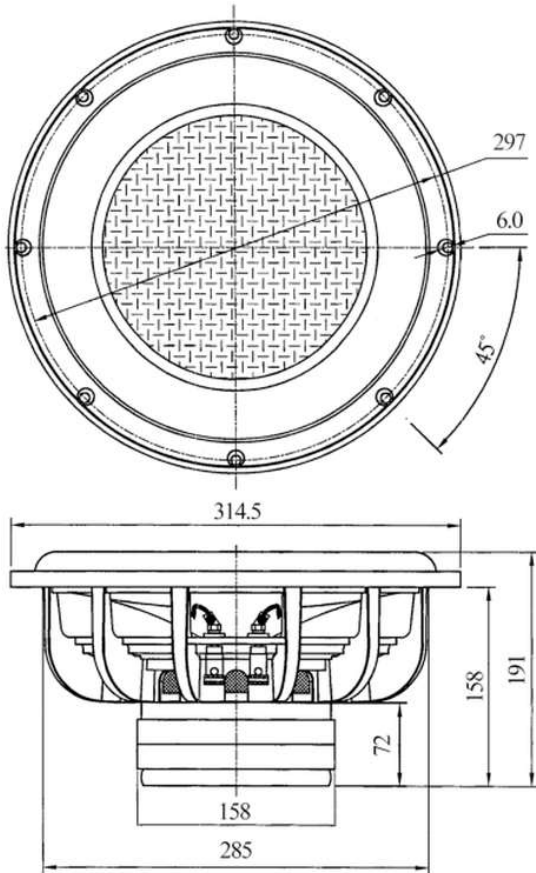

PARAMETERS	
Impedance	2+2 ohms
Re	3.2 ohms
Le	1.25 mH @ 1kHz
Fs	26.2 Hz
Qms	3.62
Qes	0.71
Qts	0.59
Mms	270g
Cms	0.14 mm/N
Sd	490.9 cm ²
Vd	932.7 cm ³
BL	N/A
Vas	46.8 liters
Xmax	19 mm
VC Diameter	63.5 mm
SPL	86.7 dB @ 2.83V/1m
RMS Power Handling	600 watts
Usable Frequency Range (Hz)	20 - 1,000 Hz

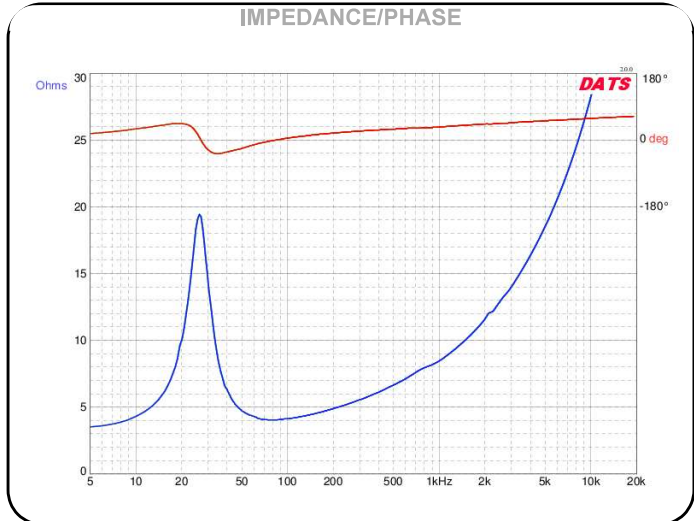

- FEATURES**
- Thick, one-piece Nomex honeycomb covered cone with woven heavy-duty glass-fiber
 - Tall-boy rubber surround for extra-long linear excursion without reducing cone surface area
 - 600 watts RMS power handling
 - Copper shorting rings and cap reduce distortion due to inductance variations
 - Dual 2 ohm, 2-layer copper voice coils

