


SU SERIES

W3-1750S

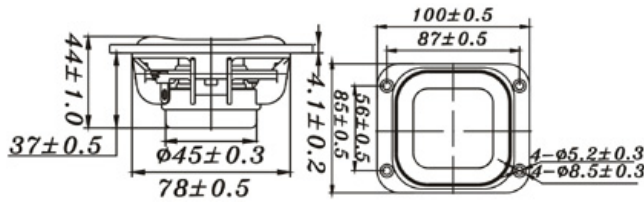

3" SUBWOOFER

- PATENTED STRUCTURE
- THE HIGHEST STABILITY AND CONSISTENCY QUALITY
- NEW MATERIAL APPLIED AND DONE BY INJECTION PROCESS
- 32mm OF VC, LONG THROW, HIGH POWER LOADING, GOOD FOR SMALL SUBWOOFER DESIGN
- NEODYMIUM MAGNET, SHIELDED
- SQUARE DIAPHRAGM TO MAXIMIZE THE EFFECTIVE AREA OF 3" DRIVER

DIAPHRAGM MTL	PP
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.5 Ω
SENSITIVITY 1W/1m	84 dB
FREQUENCY RESPONSE	65-800 Hz
FREE AIR RESONANCE	65 Hz
VOICE COIL DIAMETER	32 mm
AIR GAP HEIGHT	4 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	7 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	6 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	931.34 μMN ⁻¹
EFFEC.PISTON AREA	0.00032 M ²
Levc	0.296 mH
Zo	110 ohm
X-max	1.75 mm
Vas	1.81 Litr.
Qts	0.32
Qms	5.50



VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

Qes 0.34

CLOSE