


4" PAPER FULL RANGE

- LONG THROW, HIGH POWER LOADING DESIGN
- BAMBOO FIBER PAPER CONE WITH RUBBER SURROUND
- DIE CAST BASKET
- VENTED POLE PIECE
- UNDERHUNG DESIGN
- LOW 2nd, 3rd DISTORTION DESIGN

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.3 Ω
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	75-20K Hz
FREE AIR RESONANCE	75 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	10 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	5.31 TM
MAGNET WEIGHT (18.6 oz)	525 g
MOVING MASS	3.99 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1134 uMN ⁻¹
EFFEC.PISTON AREA	0.0057 M ²
Levc	0.026 mH
Zo	43 ohm
X-max	3 mm
Vas	5.23 Litr.
Qts	0.36
Qms	2.52
Qes	0.42

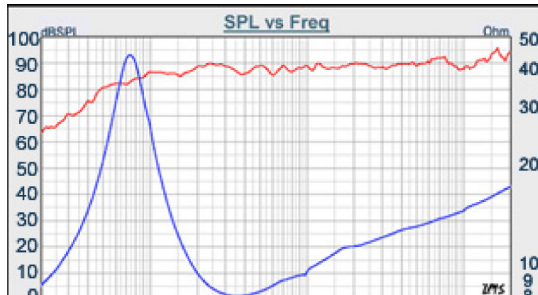

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

CLOSE