


4" TI FULL RANGE

- FULL RANGE FREQUENCY RESPONSE
- HIGH POWER LOADING DESIGN
- DIE CAST BASKET, TITANIUM COLOR PAINTED VC VENTED DESIGN
- TITANIUM CONE WITH SANTOPRENE SURROUND
- UNDERHUNG MOTOR DESIGN
- LOW 2nd, 3rd DISTORTION DESIGN

DIAPHRAGM MTL	Titanium
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.3 Ω
SENSITIVITY 1W/1m	89 dB
FREQUENCY RESPONSE	70-20K Hz
FREE AIR RESONANCE	70 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	10 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	5.32 TM
MAGNET WEIGHT (18.6 oz)	525 g
MOVING MASS	3.99 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1216 μMN ⁻¹
EFFEC.PISTON AREA	0.0057 M ²
Levc	0.027 mH
Zo	36 ohm
X-max	2.5 mm
Vas	5.61 Liter.
Qts	0.34
Qms	2.04
Qes	0.40

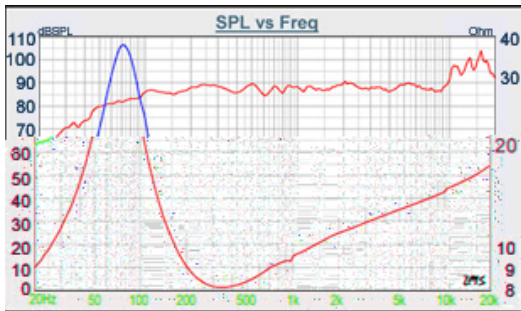

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

CLOSE