
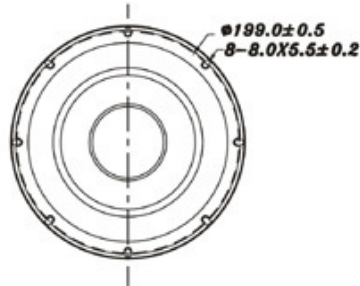


SU SERIES


W8-670Q

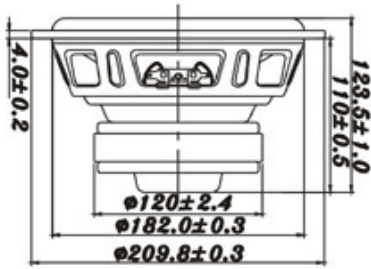

8" PAPER SUBWOOFER

- PAPER CONE WITH WILD TEMPERATURE RUBBER SURROUND
- LONG THROW ,HIGH POWER LOADING DESIGN, Xmax=7MM VENTED POLE PIECE
- STAMPED STEEL BASKET
- SUITABLE FOR SUBWOOFER APPLICATION

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 W
DCR IMPEDANCE	6.5 W
SENSITIVITY 1W/1m	86 dB
FREQUENCY RESPONSE	38-500 Hz
FREE AIR RESONANCE	38 Hz
VOICE COIL DIAMETER	38.5 mm
AIR GAP HEIGHT	8 mm
RATED POWER INPUT	70 W
MAXIMUM POWER INPUT	140 W
FORCE FACTOR, BL	12.26 TM
MAGNET WEIGHT (28.5oz)	806 g
MOVING MASS	49.89 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	362.993 μMN^{-1}
EFFEC.PISTON AREA	0.022 M^2
Levc	0.961 mH
Zo	80 ohm
X-max	7 mm
Vas	24.95 Litr.
Qts	0.46
Qms	5.35
Qes	0.51

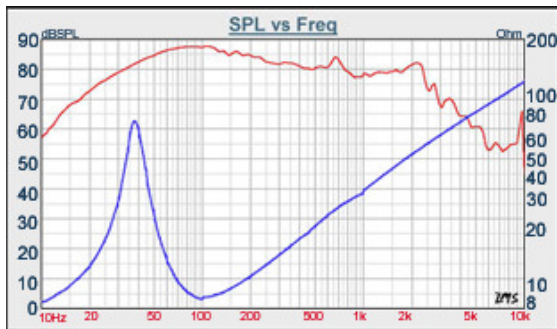

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

CLOSE