


W4-616SA



- FULL RANGE DESIGN
- HOME HI-FI, HOME THEATER, MID BASS APPLICATION
- STAMPED STEEL BASKET
- PAPER CONE WITH RUBBER SURROUND
- MAGNETICALLY SHIELDED
- CCAW WITH KAPTON BOBBIN
- ALUMINUM PHASE PLUG



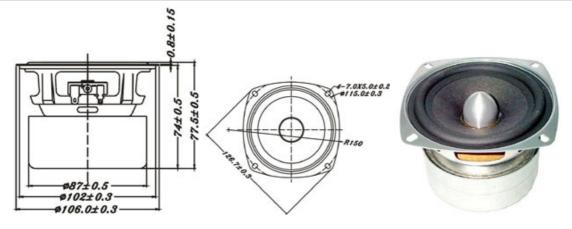

4" PAPER CONE/FULL RANGE, WOOFER

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 W
DCR IMPEDANCE	6 W
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	70-14K Hz
FREE AIR RESONANCE	70 Hz
VOICE COIL DIAMETER	25 mm
AIR GAP HEIGHT	5 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	5.4 TM
MAGNET WEIGHT (11.3oz)	308 g
MOVING MASS	4 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1215 uMN⁻ ¹
EFFEC.PISTON AREA	0.0057 M^2
Levc	0.4848 mH
Zo	69.9 ohm
X-max	3.2 mm
Vas	5.6 Litr.
Qts	0.34
Qms	2.80
Qes	0.38

CLOSE